昭华集团智慧财产,未经许可不得复制!
CHA Group of intellectual property,
Without permission to copy!

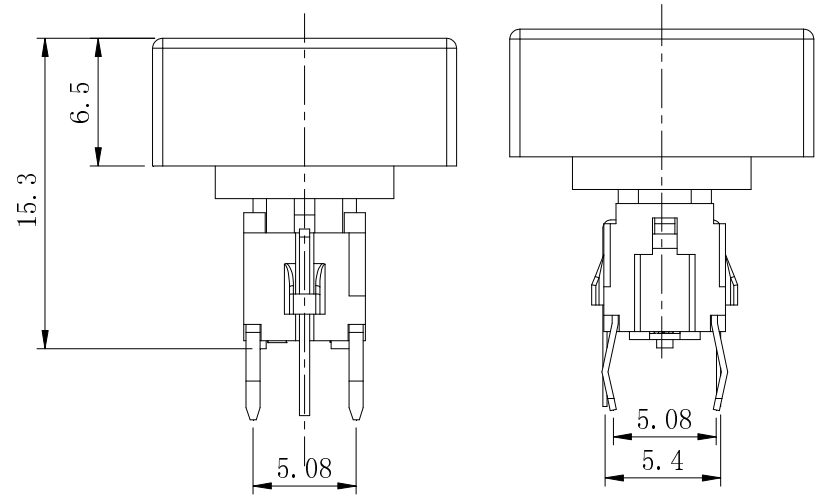

CIRCUIT



P.C.B LAYOUT



SPECIFECATION:

1.Rating:12V DC,50mA
2.Contact Resistance:≤0.05Ω
3.Withstand Voltage:AC250 V / 1MINUTE
4.Life Cycle: 100,000 Cycles
5.Insulation Resistance: ≥ 100mΩ max
6:Storage temperature:-25℃~+75℃
7:working temperature:-25℃~+75℃
8:Operating force : 160±50gf ,250±50gf

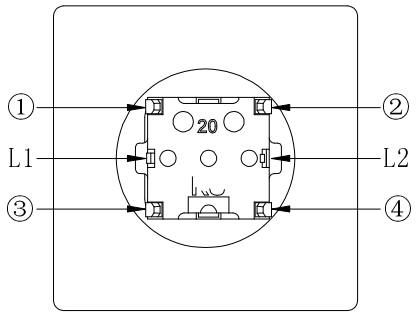

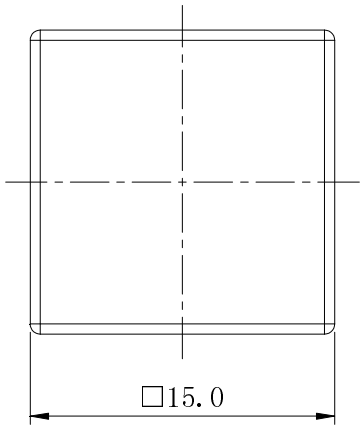

C3602— □□—□—□—V —B

Transparent color
T =Transparent color

LED color
R =Red color
G =Green color
Y =Yellow color
B =Blue color
W =White color
O =Orange color
RG =Red/Green color
RY =Red/Yellow color
RB =Red/Blue color

Operating force
6 =160 gf
8 =180gf
5 =250gf

Pattern
N =Without
X =Attachment list

V =Lead Free

B =Blister Box

序号	零件料号	名 称	材 料	数量	镀层/颜色	备 注
8		透 明 帽	PC	1	透明	
7	———	外 方 帽	PC	1	透白	
6	———	内 方 帽	PC	1	透白	
5	———	平头LED灯		1	透明	
4	———	圆 按 钮	PA66	1	瓷白	
3	———	弹 片	不锈钢 t=0.06	1	Ag	
2	———	塑 座	PA66	1	黑色	
1	———	卡 件	H62-Y1 t=0.3	1	Ag	

昭华集团（香港）有限公司
研发部 文件发行
2017年12月20日

变更单号	版 本	日 期	内 容 描 述	变 更	审 核	批 准
———	A/0	———	———	———	———	———

未注公差 mm	
>20~	±0.15
>10~20	±0.10
>5~10	±0.05
~5	±0.03

昭华集团（香港）有限公司
CHAU-HUA GROUP (HONGKONG) CO.,LIMITED

设计	韦标冀	审核	朱明华	核准	靳宏辉
发行时间	2017年12月20日			单位	研发部

型号	C3602		
系列	C3602		
描述	15X15X15.3平灯 插脚 带定位点		
比例	3:1	A4	